

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
24 December 2003 (24.12.2003)

PCT

(10) International Publication Number  
WO 03/107057 A1

(51) International Patent Classification<sup>7</sup>: G02B 6/293

(21) International Application Number: PCT/KR03/00462

(22) International Filing Date: 10 March 2003 (10.03.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
10-2002-0024493 3 May 2002 (03.05.2002) KR

(71) Applicant: KOREA ADVANCED INSTITUTE OF  
SCIENCE AND TECHNOLOGY [KR/KR]; #373-1,  
Kusong-Dong, Yusong-Gu, Taejeon 305-701 (KR).

(72) Inventors: LEE, Chang-Hee; Hanul A.P.T 110-102,  
Shinseong-dong, Yuseong-gu, Daejeon 305-345 (KR).  
KIM, Hyun-Deok; #272, Yugok-1-Li, Yuga-Myun,  
Dalseong-gun, Daegu 711-880 (KR).

(74) Agent: LEE, Jong-Il; 904 Byc Building, 648-1 Yeoksam-  
dong, Kangnam-gu, Seoul 135-080 (KR).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,  
CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM,  
HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KZ, LC, LK, LR,  
LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ,  
NO, NZ, PL, PT, RO, RU, SD, SE, SG, SK, SL, TJ, TM,  
TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,  
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,  
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,  
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: WAVELENGTH-TUNABLE LIGHT SOURCE AND WAVELENGTH-DIVISION MULTIPLEXED TRANSMISSION SYSTEM USING THE SOURCE

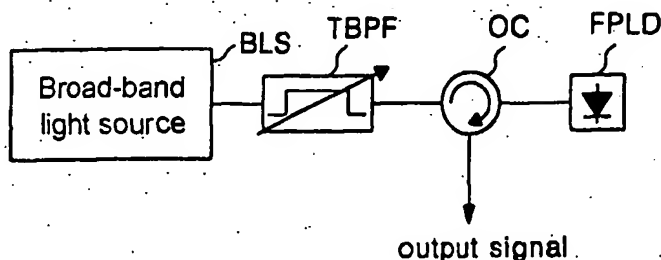

(57) Abstract: The present invention relates to a wavelength-tunable light source whose output wavelength can be externally controlled and a wavelength-division multiplexed transmission system using the source. A wavelength-tunable light source in accordance with the present invention is constituted to be able to vary the output wavelength of a Fabry-Perot laser diode, that is wavelength-locked to an injected light, by controlling the wavelength of the injected light. A wavelength-tunable light source in accordance with the present

invention provides comparatively large output power and excellent economic features. The present invention also presents a wavelength-division multiplexed transmission system using the wavelength-tunable light source.

WO 03/107057 A1

**WAVELENGTH-TUNABLE LIGHT SOURCE AND  
WAVELENGTH-DIVISION MULTIPLEXED TRANSMISSION SYSTEM  
USING THE SOURCE**

**5 BACKGROUND OF THE INVENTION**

**Field of the Invention**

The present invention relates to a light source providing a wavelength-  
10 selective output. In more detail, it relates to a wavelength-tunable light  
source whose output wavelength can be externally controlled and a  
wavelength-division multiplexed(WDM) transmission system using the  
source.

**15 Description of the Related Art**

The light source providing output at a specific wavelength is one of the  
key-elements of a wavelength-division multiplexed transmission system,  
in which each channel is discriminated by its wavelength.

20 In order to minimize the interference between adjacent channels, the  
light source of wavelength-division multiplexed transmission system  
should have a stable wavelength and a sufficient side mode suppression  
ratio(SMSR). It is also desirable to have a high output power and a  
narrow line width.

25 A distributed feed-back laser diode(DFBLD) is a representative light

source in the prior art that meets the requirements described above.

However, the DFBLD is very expensive and requires a complicated control process to fix its output wavelength at a specified point. A spectrum-sliced system, which uses a broad-band light source instead of wavelength-specified light source, has been demonstrated to reduce the cost and the complexity of system.

Incoherent broad-band light sources(ILSs) such as a light emitting diode(LED), a super-luminescent diode(SLD), and optical amplifiers emitting amplified spontaneous emissions(ASEs) are representative light sources being used for spectrum-sliced system. Spectrum-sliced systems using these light sources are very attractive since they are able to simply the wavelength control process compared with the distributed feed-back laser diode.

US Patent 5,440,417(System for spectrum-sliced fiber amplifier light for multi-channel wavelength-division-multiplexed applications) discloses a method of spectrum-slicing by using optical amplifier light source. And US Patent 5,694,234(Wavelength division multiplexing passive optical network including broadcast overlay) discloses a spectrum-sliced system by using a directly-modulated LED.

However, they also have several disadvantages. For example, LED or an SLD hardly provides sufficient output power and an optical amplifier light source requires an expensive external modulator even though its output power is comparatively large.

That is to say, the system presented in US Patent 5,440,417 requires an additional external modulator and the system presented in US Patent

5,694,234 hardly provides sufficient output power.

On the other hand, a wavelength-tunable light source improves the functionality of a wavelength-division multiplexed transmission system.

One can tune the output wavelength of a distributed feed-back laser diode(DFBLD) by temperature control, however, the tunable wavelength range is only about a few nanometers in 1330~1600nm band, the low-loss wavelength regime of a general silica-based single mode fiber.

Therefore, wavelength-tunable light sources employing an external cavity have been mainly studied in the prior art, however, they are costly and require complex devices to tune the output wavelength.

#### SUMMARY OF THE INVENTION

The present invention is proposed to solve the problems of the prior art mentioned above. The present invention presents a wavelength-tunable light source using a Fabry-Perot laser diode and a wavelength-division multiplexed transmission system employing the light source.

A Fabry-Perot laser diode can provide higher output power than both LED and SLD and is relative simple to manufacture compared with a distributed feed-back laser diode(DFBLD). However, it had not been used for a wavelength-division multiplexed transmission system since it is a multi-mode light source.

However, KR Patent 1003256870000(A light source for wavelength-division multiplexed telecommunication system using a Fabry-Perot laser diode wavelength-locked by an injected incoherent light, registered at Feb.

8, 2002) presents a method to obtain a wavelength-selective output by using a Fabry-Perot laser diode. By externally injecting a narrow-band light into a Fabry-Perot laser diode, the side mode suppression ratio increased and a high output power at a specific wavelength is obtainable.

5 As described above, a wavelength-tunable light source in accordance with the present invention is constituted to be able to tune the output wavelength by controlling the wavelength of the externally injected light.

In addition, the characteristics of the wavelength-tunable light source such as side mode suppression ratio, noise property, and output power  
10 can be optimized by controlling the temperature of a Fabry-Perot laser diode.

#### BRIEF DESCRIPTION OF THE DRAWINGS

15 FIG. 1 is a schematic diagram of an embodiment of a wavelength-tunable light source in accordance with the present invention.

FIG. 2 is a schematic diagram of an experimental setup for measuring the characteristics of an embodiment of a wavelength-tunable light source in accordance with the present invention.

20 FIG. 3a ~ FIG. 3c are optical spectra measured by the experimental setup described in FIG. 2.

FIG 4a ~ FIG. 4b are optical spectra measured by the experimental setup described in FIG. 2 with a different optical filter.

FIG. 5a is an experimental setup for measuring an eye diagram in a  
25 prior spectrum-sliced system and FIG. 5b is an experimental setup for

measuring an eye diagram of a light source in accordance with the present invention.

FIG. 6a and FIG. 6b are eye diagrams measured by the experimental setup described in FIG. 5a and FIG. 5b respectively.

5      FIG. 7 is the first embodiment of a wavelength-division multiplexed transmission system in accordance with the present invention.

FIG. 8 is the second embodiment of a wavelength-division multiplexed transmission system in accordance with the present invention.

10      FIG. 9 is the third embodiment of a wavelength-division multiplexed transmission system in accordance with the present invention.

FIG. 10 is the fourth embodiment of a wavelength-division multiplexed transmission system in accordance with the present invention.

15      FIG. 11 is the fifth embodiment of a wavelength-division multiplexed transmission system using a light source in accordance with the present invention.

< Description of the Numerals(Symbols) on the Main Parts of the Drawings>

**100** : an optical transmission system

**BLS** : a broad-band light source

20      **EDFA** : a two-stage Erbium-doped fiber amplifier

**(D)MUX1** : a  $2N \times 1$  (de)multiplexer

**(D)MUX2** : an  $N \times 1$  (de)multiplexer

**DR** : a laser diode driving circuit

**EM** : an external modulator

25      **EMDR** : an external modulator driving circuit

FPLD : a Fabry-Perot laser diode

IL : an wavelength interleaver

OC : an optical circulator

OSA : an optical spectrum analyzer

5 OSC : an oscilloscope

RX : an optical receiver

TBPF : a tunable band-pass filter

TEC : a temperature controller

WDM : a wavelength-division multiplexer

10

## DETAILED DESCRIPTION OF THE EMBODIMENTS

Hereinafter, referring to appended drawings, the structures and operation principles of embodiments of the present invention are described in detail.

15

As described in FIG 1, a wavelength-tunable light source in accordance with the present invention comprises a broad-band light source(BLS), a tunable band-pass filter(TBPF), an optical circulator and a Fabry-Perot laser diode.

20 Here, a broad-band light source is either one of a incoherent light sources such as a fiber optical amplifier emitting amplified spontaneous emissions, a semiconductor optical amplifier, a light emitting diode and a super-luminescent or a coherent light source super continuum source.

It is desirable that a Fabry-Perot laser diode(FPLD) should not contain an optical isolator for a efficient light injection.

25

A tunable band-pass filter(TBPF) selectively passes the light to be injected.

A Fabry-Perot laser diode(FPLD) is a multi-mode light source without an external light being injected thereto, however, if a light is injected thereto from outside, among the oscillation modes of the Fabry-Perot laser diode, a mode or modes within the range of the injected light will output relatively high power while the modes out of the range will be suppressed.

Consequently, a wavelength-selective output is outputted through an optical circulator(OC) connected to a Fabry-Perot laser diode(FPLD).

Here, since the output wavelength of the light source is determined by the light injected into a Fabry-Perot laser diode(FPLD), it can be tuned by controlling the band-pass of a tunable band-pass filter(TBPF).

The wavelengths of cavity modes of a Fabry-Perot laser diode(FPLD) vary according to the temperature of the Fabry-Perot laser diode.

With this characteristic, the characteristics of a wavelength-tunable light source such as side mode suppression ratio, noise property, output power, and output spectrum can be controlled by controlling the temperature of a Fabry-Perot laser diode(FPLD).

In addition, the characteristics of a wavelength-tunable light source such as side mode suppression ratio, noise property, output power, and output spectrum also can be controlled by controlling the temperature of a Fabry-Perot laser diode(FPLD).

The output power of the wavelength-tunable light source varies as the bias current applied to a Fabry-Perot laser diode(FPLD).

Thus, a wavelength-tunable light source can be modulated not only by



using an external modulator but also directly.

If an appropriate current is being applied to a Fabry-Perot laser diode(FPLD), the output of a wavelength-tunable light source is polarized, however, the reflected injection can be unpolarized.

5 With this characteristic, the extinction ratio of a modulated optical signal can be improved by additionally installing a polarization controller and a polarizer at the output port of an optical circulator(OC).

That is to say, by controlling a polarization controller for the output power of a wavelength-tunable light source to be maximized, the  
10 extinction ratio of the output of a wavelength-tunable light source can be maximized.

In a light source in accordance with the present invention, an optical circulator(OC) is used to reduce optical insertion losses.

However, even though an optical circulator(OC) is substituted with a  
15 low-cost optical power combiner, a light source having the similar characteristics can be achieved.

FIG. 2 shows an experimental setup for measuring the characteristics of an embodiment of a wavelength-tunable light source in accordance with the present invention.

20 A two-stage Erbium-doped fiber amplifier(EDFA) is used for an broad-band light source(BLS) in FIG. 1, and a Fabry-Perot etalon filter is used for a tunable band-pass filter(TBPF).

The two-stage Erbium-doped fiber amplifier(EDFA) outputs amplified spontaneous emission(ASE), which is a incoherent light having a band-  
25 width larger than 30nm.

A Fabry-Perot etalon filter(FPEF) with a 3-dB band-width of about 2.5GHz selectively passes erbium-doped fiber amplifier(EDFA) output and the pass-band can be controlled by applying the voltage.

5 The power of the incoherent light injected into a Fabry-Perot laser diode(FPLD) through an optical circulator(OC) is -2dBm, the threshold current of the Fabry-Perot laser diode(FPLD) is 10mA, and a bias current of 17mA is applied thereto.

The cavity length of the Fabry-Perot laser diode(FPLD) is about 400 um and the mode spacing is about 100 GHz, which corresponds to 40 times  
10 of the 3-dB band-width of the Fabry-Perot etalon filter(FPEF).

In the figure, OSA represents an optical spectrum analyzer.

FIG. 3a shows output spectra of a Fabry-Perot laser diode(FPLD) measured without an ASE injection, FIG. 3b shows the spectra of lights injected into a Fabry-Perot laser diode, and FIG. 3c shows the output  
15 spectra of a wavelength-tunable light source after the lights in FIG. 3b being injected thereto respectively.

The peak wavelengths of the lights injected into a Fabry-Perot laser diode(FPLD) are 1530nm, 1545nm and 1560nm, respectively, and the temperature of the Fabry-Perot laser diode(FPLD) was set for the side  
20 mode suppression ratio measured in FIG. 3c to be maximized in each case.

After a light injection, a Fabry-Perot laser diode provides a wavelength-selected output with a specific wavelength according to the wavelength of the injected light. The side mode suppression ratios measured are more  
25 than 30dB and the output powers were about 0dBm.

Therefore, it can be noticed that a light source in accordance with the present invention provides a narrow-band output with about more than 30nm of wavelength-tunable range.

FIG 4a is an optical spectrum measured by the experimental setup described in FIG. 2 with a different optical filter, whose 3-dB bandwidth is about 100 GHz.

The center wavelength of the filter is about 1558.8 nm.

Here, the 3-dB bandwidth of the filter is comparable to the mode spacing of a of the Fabry-Perot laser diode(FPLD). In general, the light source in accordance with the present invention is can be realized while a light with a 3-dB bandwidth of several times of the mode spacing of Fabry-Perot laser diode is injected into the Fabry-Perot laser diode.

FIG. 4b is an optical spectrum measured by the same experimental setup, however, the temperature of the Fabry-Perot laser diode is tuned in order that the center wavelength of the injected light corresponds to the a mid-point of two cavity modes.

In this case, the light source provides a wavelength-selective output.

A Fabry-Perot laser diode(FPLD) used for a wavelength-tunable light source in accordance with the present invention can suppress the intensity noise of an injected incoherent light.

That is to say, as presented in the paper by Jae-Seung Lee("Signal-to-noise ratio measurement of a 2.5-Gb/s spectrum-sliced incoherent light channel", *IEEE Photon. Technol. Lett.*, vol.1, no.1, pp.94-96, 1997), a spectrum-sliced incoherent light has a large intensity noise.

This kind of intensity noise degrades the performance of a spectrum-

sliced system.

In a wavelength-tunable light source in accordance with the present invention, a Fabry-Perot laser diode suppresses intensity noise of the injected incoherent light.

5 An experimental setup can be constituted for confirming this characteristic as described in FIG. 5.

The experimental setup described in FIG. 5a is for a prior spectrum-sliced system, which uses an external modulator(EM) followed by a tunable band-pass filter(TBPF) modulates narrow-band incoherent filter and thereafter measures its eye diagram using an oscilloscope(OSC).

10 The experimental setup described in FIG. 5b is for a wavelength-tunable light source in accordance with the present invention, which injects an incoherent into a Fabry-Perot laser diode(FPLD), directly modulates the Fabry-Perot laser diode, and thereafter measures its eye diagram using an oscilloscope(OSC).

15 A Fabry-Perot etalon filter(FPEF) with a 3-dB bandwidth of about 2.5 GHz was used as a tunable band-pass filter(TBPF).

In both cases, the modulation bit rate were 622Mb/s and the length of pseudo-random block signal(PRBS) applied to the external modulator or the Fabry-Perot laser diode(FPLD) was  $2^{31}-1$ .

20 FIG. 6a and FIG. 6b are showing the eye diagrams measured in both cases respectively. Referring to the figures, it can be noticed that a wavelength-tunable light source in accordance with the present invention is suppressing the intensity noise of the incoherent light.

As mentioned thereinbefore, a wavelength-tunable light source in accordance with the present invention can be used for various applications in a wavelength-division multiplexed transmission system.

FIG. 7 shows the first embodiment of a wavelength-division multiplexed transmission system using a light source in accordance with the present invention, which outputs  $N$  first-group wavelength-division-multiplexed optical signals( $\lambda_1, \lambda_3, \dots, \lambda_{2N-1}$ ) through an optical fiber and receives  $N$  second-group wavelength-division-multiplexed optical signals( $\lambda_2, \lambda_4, \dots, \lambda_{2N}$ ) inputted through the fiber.

As described in FIG. 7, a wavelength-division multiplexed transmission system in accordance with the present invention comprises  $N$  Fabry-Perot laser diodes(FPLD1, FPLD2, ..., FPLDn),  $N$  laser diode driving circuits(DR1, DR2, ..., DRn),  $N$  laser diode temperature controllers(TEC1, TEC2, ..., TECn),  $N$  optical receivers(RX1, RX2, ..., RXn), a  $2N \times 1$  (de)multiplexer((D)MUX1), a (de)multiplexer temperature controller(TEC), two wavelength interleavers(IL1, IL2), an optical circulator(OC) and an broad-band light source(BLS).

A (de)multiplexer((D)MUX1) demultiplexes wavelength-division multiplexed optical signals inputted through a common and outputs them through  $2N$  input/output ports respectively. Or, it multiplexes the optical signals having different wavelengths, which are inputted through  $2N$  input/output ports respectively, and outputs them through the common port.

The wavelengths of the first-group optical signals( $\lambda_1, \lambda_3, \dots, \lambda_{2N-1}$ ) and the second-group optical signals( $\lambda_2, \lambda_4, \dots, \lambda_{2N}$ ) are arranged to be

interlaid. The first-group optical signals( $\lambda_1, \lambda_3, \dots, \lambda_{2N-1}$ ) can be transferred between a common port and odd-numbered ports(1, 3, ..., 2N-1) of a (de)multiplexer((D)MUX1) and the second-group optical signals( $\lambda_2, \lambda_4, \dots, \lambda_{2N}$ ) can be transferred between a common port and even-numbered ports(2, 4, ..., 2N) of a (de)multiplexer.

An broad-band light source(BLS) emits a wide-band light.

The optical circulator(OC) outputs the optical signals inputted through the first port through the second port and the optical signals inputted through the second port through the third port.

The wavelength interleavers(IL1, IL2) transfer the first-group optical signals( $\lambda_1, \lambda_3, \dots, \lambda_{2N-1}$ ) and block the second-group optical signals( $\lambda_2, \lambda_4, \dots, \lambda_{2N}$ ) between the first port and the second port, and on the other hand, they transfer the second-group optical signals( $\lambda_2, \lambda_4, \dots, \lambda_{2N}$ ) and block the first-group optical signals( $\lambda_1, \lambda_3, \dots, \lambda_{2N-1}$ ) between the first port and the third port.

The connection of a transmission system(100) described above can be performed as follows:

N Fabry-Perot laser diodes(FPLD1, FPLD2, ..., FPLDn) are connected to the odd-numbered ports of a (de)multiplexer((D)MUX1), and N optical receivers(RX1, RX2, ..., RXn) are connected to the even-numbered ports of the (de)multiplexer((D)MUX1) respectively.

The common port of a (de)multiplexer((D)MUX1) is connected to the first port of a first wavelength interleaver(IL1), the second port of the first wavelength interleaver(IL1) is connected to the second port of an optical circulator(OC), the first port of the optical circulator(OC) is connected to

an broad-band light source(BLS) and the third port of the optical circulator(OC) is connected to the second port of a second wavelength interleaver(IL2).

The third port of the first wavelength interleaver(IL1) and the third port  
5 of the second wavelength interleaver(IL2) are connected to each other, and the first port of the second wavelength interleaver(IL2) becomes an output port of a transmission system(100).

Looking into the operation principle of a transmission system(100), an  
10 broad-band light source(BLS) emits a wide-band light, the emitted light is then inputted through the first port of an optical circulator(OC), passing through the second port, and then inputted into the second port of a first wavelength interleaver(IL1).

Then, the first wavelength interleaver(IL1) outputs some portion of the inputted wide-band light through the first port.

15 The output from the first wavelength interleaver(IL1) is inputted into the common port of a (de)multiplexer((D)MUX1), and outputted through corresponding odd-numbered ports of the (de)multiplexer((D)MUX1) respectively.

The outputs from the (de)multiplexer((D)MUX1) are inputted into N  
20 Fabry-Perot laser diodes(FPLD1, FPLD2, ..., FPLDn) respectively, and then N Fabry-Perot laser diodes(FPLD1, FPLD2, ..., FPLDn) output first-group optical signals( $\lambda_1, \lambda_3, \dots, \lambda_{2N-1}$ ) whose wavelengths are within the pass-bands of the odd-numbered ports of the (de)multiplexer((D)MUX1) respectively.

25 The first-group optical signals( $\lambda_1, \lambda_3, \dots, \lambda_{2N-1}$ ) are multiplexed by the

(de)multiplexer((D)MUX1), and then inputted into the first port of the first wavelength interleaver(IL1).

The first-group optical signals( $\lambda_1, \lambda_3, \dots, \lambda_{2N-1}$ ) inputted into the first wavelength interleaver(IL1) are outputted through the second port, passing through the second port and the third port of the optical circulator(OC), and then inputted into the second port of a second wavelength interleaver(IL2) to be outputted through the first port of the second wavelength interleaver(IL2).

The second-group optical signals( $\lambda_2, \lambda_4, \dots, \lambda_{2N}$ ) inputted into the first port of the second wavelength interleaver(IL2) are outputted through the third port, and then inputted into the third port of the first wavelength interleaver(IL1) to be outputted through the first port, and thereafter inputted into the common port of the (de)multiplexer((D)MUX1).

The second-group optical signals( $\lambda_2, \lambda_4, \dots, \lambda_{2N}$ ) inputted through the common port are outputted through the corresponding even-numbered ports of the (de)multiplexer((D)MUX1), and then received by optical receivers(RX1, RX2, ..., RXn) respectively.

Here, the transmission system(100) may further comprise N laser diode driving circuits(DR1, DR2, ..., DRn) to modulate N Fabry-Perot laser diodes N Fabry-Perot laser diodes(FPLD1, FPLD2, ..., FPLDn), N laser diode temperature controllers(TEC1, TEC2, ..., TECn) for controlling the temperatures of N Fabry-Perot laser diodes(FPLD1, FPLD2, ..., FPLDn) and a temperature controller(TEC) for controlling the temperature of the (de)multiplexer((D)MUX1).



FIG. 8 shows the second embodiment of a wavelength-division multiplexed transmission system using a light source in accordance with the present invention, which outputs  $N$  third-group wavelength-division-multiplexed optical signals( $\lambda_1, \lambda_2, \dots, \lambda_N$ ) through an optical fiber and receives  $N$  fourth-group wavelength-division-multiplexed optical signals( $\lambda_{N+1}, \lambda_{N+2}, \dots, \lambda_{2N}$ ) inputted through the fiber.

As described in FIG. 8, a wavelength-division multiplexed transmission system in accordance with the present invention comprises  $N$  Fabry-Perot laser diodes(FPLD1, FPLD2, ..., FPLDn),  $N$  laser diode driving circuits(DR1, DR2, ..., DRn),  $N$  laser diode temperature controllers(TEC1, TEC2, ..., TECn),  $N$  optical receivers(RX1, RX2, ..., RXn), a  $2N \times 1$  (de)multiplexer((D)MUX1), a (de)multiplexer temperature controller(TEC), two wavelength-division multiplexers(WDM1, WDM2), an optical circulator(OC) and an broad-band light source(BLS).

A (de)multiplexer((D)MUX1) demultiplexes wavelength-division multiplexed optical signals inputted through a common port and outputs them through  $2N$  input/output ports respectively. Or, it multiplexes the optical signals having different wavelengths, which are inputted through  $2N$  input/output ports respectively, and outputs them through the common port.

The wavelengths of the third-group optical signals( $\lambda_1, \lambda_2, \dots, \lambda_N$ ) and the fourth-group optical signals( $\lambda_{N+1}, \lambda_{N+2}, \dots, \lambda_{2N}$ ) are arranged in different wavelength-bands respectively. The third-group optical signals( $\lambda_1, \lambda_2, \dots, \lambda_N$ ) can be transferred between a common port and the (first ~  $N$ -th) ports of a (de)multiplexer((D)MUX1) and the fourth-group optical signals( $\lambda_{N+1},$

$\lambda_{N+2}, \dots, \lambda_{2N}$ ) can be transferred between a common port and the (N+1-th ~ 2N-th) ports of a (de)multiplexer.

An broad-band light source(BLS) emits a wide-band light.

The optical circulator(OC) outputs the optical signals inputted through the first port through the second port and the optical signals inputted through the second port through the third port.

The wavelength-division multiplexers(WDM1, WDM2) transfer the third-group optical signals( $\lambda_1, \lambda_2, \dots, \lambda_N$ ) and block the fourth-group optical signals( $\lambda_{N+1}, \lambda_{N+2}, \dots, \lambda_{2N}$ ) between the first port and the second port, and on the other hand, they transfer the fourth-group optical signals( $\lambda_{N+1}, \lambda_{N+2}, \dots, \lambda_{2N}$ ) and block the third-group optical signals( $\lambda_1, \lambda_2, \dots, \lambda_N$ ) between the first port and the third port.

The connection of a transmission system(100) described above can be performed as follows:

N Fabry-Perot laser diodes(FPLD1, FPLD2, ..., FPLDn) are connected to the (first ~ N-th) ports of a (de)multiplexer((D)MUX1), and N optical receivers(RX1, RX2, ..., RXn) are connected to the (N+1-th ~ 2N-th) ports of the (de)multiplexer((D)MUX1) respectively.

The common port of a (de)multiplexer((D)MUX1) is connected to the first port of a first wavelength-division multiplexer(WDM1), the second port of the first wavelength-division multiplexer(WDM1) is connected to the second port of an optical circulator(OC), the first port of the optical circulator(OC) is connected to an broad-band light source(BLS) and the third port of the optical circulator(OC) is connected to the second port of a second wavelength-division multiplexer(WDM2).

The third port of the first wavelength-division multiplexer(WDM1) and the third port of the second wavelength-division multiplexer(WDM2) are connected to each other, and the first port of the second wavelength-division multiplexer(WDM2) becomes an output port of a transmission system(100).

Looking into the operation principle of a transmission system(100), the output of an broad-band light source(BLS) is inputted through the first port of an optical circulator(OC), passing through the second port, and then inputted into the second port of a first wavelength-division multiplexer(WDM1).

Then, the first wavelength-division multiplexer(WDM1) outputs some portion of the inputted wide-band light through the first port.

The output from the first wavelength-division multiplexer(WDM1) is inputted into the common port of a (de)multiplexer((D)MUX1), and outputted through the corresponding (first ~ N-th) ports of the (de)multiplexer((D)MUX1) respectively.

The outputs from the (de)multiplexer((D)MUX1) are inputted into N Fabry-Perot laser diodes(FPLD1, FPLD2, ..., FPLDn) respectively, and then N Fabry-Perot laser diodes(FPLD1, FPLD2, ..., FPLDn) output third-group optical signals( $\lambda_1, \lambda_2, \dots, \lambda_N$ ) whose wavelengths are within the pass-bands of the (first ~ N-th) ports of the (de)multiplexer((D)MUX1) respectively.

The third-group optical signals( $\lambda_1, \lambda_2, \dots, \lambda_N$ ) are multiplexed by the (de)multiplexer((D)MUX1), and then inputted into the first port of the first wavelength-division multiplexer(WDM1).

The third-group optical signals( $\lambda_1, \lambda_2, \dots, \lambda_N$ ) inputted into the first wavelength-division multiplexer(WDM1) are outputted through the second port, passing through the second port and the third port of the optical circulator(OC), and then inputted into the second port of a second wavelength-division multiplexer(WDM2) to be outputted through the first port of the second wavelength-division multiplexer(WDM2).

The fourth-group optical signals( $\lambda_{N+1}, \lambda_{N+2}, \dots, \lambda_{2N}$ ) inputted into the first port of the second wavelength-division multiplexer(WDM2) are outputted through the third port, and then inputted into the third port of the first wavelength-division multiplexer(WDM1) to be outputted through the first port, and thereafter inputted into the common port of the (de)multiplexer((D)MUX1).

Then, the signals inputted through the common port are outputted through the corresponding (N+1-th ~ 2N-th) ports of the (de)multiplexer((D)MUX1) and received by optical receivers(RX1, RX2, ..., RXn) connected to the ports respectively.

Here, the transmission system(100) may further comprise N laser diode driving circuits(DR1, DR2, ..., DRn) to modulate N Fabry-Perot laser diodes(FPLD1, FPLD2, ..., FPLDn), N laser diode temperature controllers(TEC1, TEC2, ..., TECn) for controlling the temperatures of N Fabry-Perot laser diodes(FPLD1, FPLD2, ..., FPLDn) and a temperature controller(TEC) for controlling the temperature of the (de)multiplexer((D)MUX1).

FIG. 9 shows a third embodiment of a wavelength-division multiplexed

transmission system using a light source in accordance with the present invention, which outputs  $N$  fifth-group wavelength-division-multiplexed optical signals( $\lambda_1, \lambda_2, \dots, \lambda_N$ ) through an optical fiber and receives  $N$  sixth-group wavelength-division-multiplexed optical signals( $\lambda_{N+1}, \lambda_{N+2}, \dots, \lambda_{2N}$ ) inputted through the fiber.

As described in FIG. 9, a wavelength-division multiplexed transmission system in accordance with the present invention comprises  $N$  Fabry-Perot laser diodes(FPLD1, FPLD2, ..., FPLDn),  $N$  laser diode driving circuits(DR1, DR2, ..., DRn),  $N$  laser diode temperature controllers(TEC1, TEC2, ..., TECn),  $N$  optical receivers(RX1, RX2, ..., RXn), an  $N \times 1$  (de)multiplexer((D)MUX2), a (de)multiplexer temperature controller(TEC),  $(N+2)$  wavelength-division multiplexers(WDM1, ..., WDMn+1, WDMn+2), an optical circulator(OC) and an broad-band light source(BLS).

A (de)multiplexer((D)MUX2) demultiplexes wavelength-division multiplexed optical signals inputted through a common port and outputs them through  $N$  input/output ports respectively. Or, it multiplexes the optical signals having different wavelengths, which are inputted through  $N$  input/output ports respectively, and outputs them through the common port. Here, the signal transfer characteristics between the common port and each input/output port are repeated with a wavelength interval of  $I$  (an arbitrary integer) times the free spectral range of the (de)multiplexer((D)MUX2).

The wavelengths of the fifth-group optical signals( $\lambda_1, \lambda_2, \dots, \lambda_N$ ) and the sixth-group optical signals( $\lambda_{N+1}, \lambda_{N+2}, \dots, \lambda_{2N}$ ) are arranged in different wavelength-bands respectively. Both the fifth-group optical signals( $\lambda_1, \lambda_2,$

...,  $\lambda_N$ ) and the sixth-group optical signals( $\lambda_{N+1}$ ,  $\lambda_{N+2}$ , ...,  $\lambda_{2N}$ ) can be transferred between a common port and N input/output ports of a (de)multiplexer((D)MUX2), however, the wavelengths of the fifth-group optical signals( $\lambda_1$ ,  $\lambda_2$ , ...,  $\lambda_N$ ) and the sixth-group optical signals( $\lambda_{N+1}$ ,  $\lambda_{N+2}$ , ...,  $\lambda_{2N}$ ) are arranged to be apart from each other with the interval of I(an arbitrary integer) times the free spectral range of the (de)multiplexer((D)MUX2) respectively.

An broad-band light source(BLS) emits a wide-band light.

The optical circulator(OC) outputs the optical signals inputted through the first port through the second port and the optical signals inputted through the second port through the third port.

The wavelength-division multiplexers(WDM1, ..., WDM $n+1$ , WDM $n+2$ ) transfer the fifth-group optical signals( $\lambda_1$ ,  $\lambda_2$ , ...,  $\lambda_N$ ) and block the sixth-group optical signals( $\lambda_{N+1}$ ,  $\lambda_{N+2}$ , ...,  $\lambda_{2N}$ ) between the first port and the second port, and on the other hand, they transfer the sixth-group optical signals( $\lambda_{N+1}$ ,  $\lambda_{N+2}$ , ...,  $\lambda_{2N}$ ) and block the fifth-group optical signals( $\lambda_1$ ,  $\lambda_2$ , ...,  $\lambda_N$ ) between the first port and the third port.

The connection of a transmission system(100) described above can be performed as follows:

N input/output ports of a (de)multiplexer((D)MUX2) are connected to the first ports of N wavelength-division multiplexers(WDM3, ..., WDM $n+1$ , WDM $n+2$ ), N Fabry-Perot laser diodes(FPLD1, FPLD2, ..., FPLD $n$ ) are connected to the second ports of N wavelength-division multiplexers(WDM3, ..., WDM $n+1$ , WDM $n+2$ ), and N optical receivers(RX1, RX2, ..., RX $n$ ) are connected to the third ports of N wavelength-division

multiplexers(WDM3, ..., WDM<sub>n+1</sub>, WDM<sub>n+2</sub>) respectively.

5 The common port of a (de)multiplexer((D)MUX2) is connected to the first port of a first wavelength-division multiplexer(WDM1), the second port of the first wavelength-division multiplexer(WDM1) is connected to the second port of the optical circulator(OC), the first port of an optical circulator(OC) is connected to an broad-band light source(BLS) and the third port of the optical circulator(OC) is connected to the second port of a second wavelength-division multiplexer(WDM2).

10 The third port of the first wavelength-division multiplexer(WDM1) and the third port of the second wavelength-division multiplexer(WDM2) are connected to each other, and the first port of the second wavelength-division multiplexer(WDM2) becomes an output port of a transmission system(100).

15 Looking into the operation principle of a transmission system(100), the output of an broad-band light source(BLS) is inputted through the first port of an optical circulator(OC), passing through the second port, and then inputted into the second port of a first wavelength-division multiplexer(WDM1).

20 Then, the first wavelength-division multiplexer(WDM1) outputs some portion of the inputted light through the first port.

The output from the first wavelength-division multiplexer(WDM1) is inputted into the common port of a (de)multiplexer((D)MUX2), and then outputted through the corresponding input/output ports of the (de)multiplexer((D)MUX2) respectively.

25 The outputs from the (de)multiplexer((D)MUX2) are inputted into the

first ports of N wavelength-division multiplexers(WDM3, ..., WDM<sub>n+1</sub>, WDM<sub>n+2</sub>), and then outputted through the second ports to be inputted into N Fabry-Perot laser diodes(FPLD1, FPLD2, ..., FPLD<sub>n</sub>) respectively.

N Fabry-Perot laser diodes(FPLD1, FPLD2, ..., FPLD<sub>n</sub>) output fifth-group optical signals( $\lambda_1, \lambda_2, \dots, \lambda_N$ ) whose wavelengths are within the pass-bands of the N input/output ports of the (de)multiplexer((D)MUX2) respectively.

The fifth-group optical signals( $\lambda_1, \lambda_2, \dots, \lambda_N$ ) are transferred through N wavelength-division multiplexers(WDM3, ..., WDM<sub>n+1</sub>, WDM<sub>n+2</sub>) to be inputted into the (de)multiplexer((D)MUX2) and multiplexed therein. Then the multiplexed signals are inputted into the first port of the first wavelength-division multiplexer(WDM1).

The fifth-group optical signals( $\lambda_1, \lambda_2, \dots, \lambda_N$ ) inputted into the first wavelength-division multiplexer(WDM1) are outputted through the second port, passing through the second port and the third port of the optical circulator(OC), and then inputted into the second port of the second wavelength-division multiplexer(WDM2) to be outputted through the first port of the second wavelength-division multiplexer(WDM2).

The sixth-group optical signals( $\lambda_{N+1}, \lambda_{N+2}, \dots, \lambda_{2N}$ ) inputted into the first port of the second wavelength-division multiplexer(WDM2) are outputted through the third port, and then inputted into the third port of the first wavelength-division multiplexer(WDM1) to be outputted through the first port, and thereafter inputted into the common port of the (de)multiplexer((D)MUX2).

The sixth-group optical signals( $\lambda_{N+1}, \lambda_{N+2}, \dots, \lambda_{2N}$ ) inputted through the



common port are outputted through the corresponding input/output ports of the (de)multiplexer((D)MUX2) to be inputted into the first ports of N wavelength-division multiplexers(WDM3, ..., WDMn+1, WDMn+2) respectively.

5 The sixth-group optical signals( $\lambda_{N+1}$ ,  $\lambda_{N+2}$ , ...,  $\lambda_{2N}$ ) inputted into N wavelength-division multiplexers(WDM3, ..., WDMn+1, WDMn+2) are then outputted through the third ports of the wavelength-division multiplexers to be received by optical receivers(RX1, RX2, ..., RXn).

Here, the transmission system(100) may further comprise N laser diode driving circuits(DR1, DR2, ..., DRn) to modulate N Fabry-Perot laser diodes(FPLD1, FPLD2, ..., FPLDn), N laser diode temperature controllers(TEC1, TEC2, ..., TECn) for controlling the temperatures of N Fabry-Perot laser diodes(FPLD1, FPLD2, ..., FPLDn) and a temperature controller(TEC) for controlling the temperature of the (de)multiplexer((D)MUX2).

10  
15

FIG. 10 is the fourth embodiment of a wavelength-division multiplexed transmission system using a light source in accordance with the present invention.

20 As described in FIG. 10, a wavelength-division multiplexed transmission system in accordance with the present invention comprises N Fabry-Perot laser diodes(FPLD1, FPLD2, ..., FPLDn), N laser diode temperature controllers(TEC1, TEC2, ..., TECn), an N×1 (de)multiplexer((D)MUX2), a (de)multiplexer temperature controller(TEC), an optical circulator(OC), an  
25 broad-band light source(BLS), an external modulator(EM), and an

external modulator driving circuit(EMDR).

A (de)multiplexer((D)MUX2) demultiplexes wavelength-division multiplexed optical signals inputted through a common port and outputs them through N input/output ports respectively. Or, it multiplexes the optical signals having different wavelengths, which are inputted through N input/output ports respectively, and outputs them through the common port.

An broad-band light source(BLS) emits a wide-band light.

The optical circulator(OC) outputs the optical signals inputted through the first port through the second port and the optical signals inputted through the second port through the third port.

The connection of a transmission system(100) described above can be performed as follows:

N Fabry-Perot laser diodes(FPLD1, FPLD2, ..., FPLDn) are connected to N ports of a (de)multiplexer((D)MUX2) respectively, and the common port of the (de)multiplexer((D)MUX2) is connected to the second port of an optical circulator(OC).

The first port of the optical circulator(OC) is connected to an broad-band light source(BLS) and the third port of the optical circulator(OC) is connected to an external modulator(EM).

An external modulator driving circuit(EMDR) is connected to the external modulator(EM), and thus electric signals are inputted into the external modulator driving circuit(EMDR) and modulated optical signals are outputted through the external modulator(EM).

Looking into the operation principle of a transmission system(100), the

output of an broad-band light source(BLS) is inputted through the first port of an optical circulator(OC), passing through the second port to be inputted into the common port of a (de)multiplexer((D)MUX2), and then outputted through the corresponding N ports of (de)multiplexer((D)MUX2) respectively.

The outputs from the (de)multiplexer((D)MUX2) are inputted into N Fabry-Perot laser diodes(FPLD1, FPLD2, ..., FPLDn) respectively, and each of the Fabry-Perot laser diodes(FPLD1, FPLD2, ..., FPLDn) outputs optical signals whose wavelengths are within the within the pass-bands of the N ports of a (de)multiplexer((D)MUX2) respectively.

The outputs from N Fabry-Perot laser diodes(FPLD1, FPLD2, ..., FPLDn) are multiplexed by the (de)multiplexer((D)MUX2), passing through the optical circulator(OC), and then inputted into the external modulator(EM). Then, the external modulator(EM) modulates the inputted optical signals, with using the received electric signals, and outputs the modulated signals.

In a transmission system(100) described above, by controlling the currents applied to the Fabry-Perot laser diodes(FPLD1, FPLD2, ..., and FPLDn), it is possible to control that optical signals with a(or more than 2) specific wavelength(s) are outputted through the external modulator(EM).

A transmission system(100) of the present invention further comprises N polarization controllers(PC1, PC2, ..., PCn) connected between the input/output ports of a (de)multiplexer((D)MUX2) and N Fabry-Perot laser diodes(FPLD1, FPLD2, ..., FPLDn) or a polarization controller(PC) connected between an external modulator(EM) and an optical

circulator(OC).

The transmission system(100) further comprises N laser diode temperature controllers(TEC1, TEC2, ..., TECn) for controlling the temperatures of N Fabry-Perot laser diodes(FPLD1, FPLD2, ..., FPLDn) and a temperature controller(TEC) for controlling the temperature of a (de)multiplexer((D)MUX2).

FIG. 12 shows the fifth embodiment of a wavelength-division multiplexed transmission system using a light source in accordance with the present invention, which further comprises an optical receiver(RX) with the structure of a transmission system described in FIG. 10.

An optical receiver(RX) converts the input optical signals into electric signals.

With comprising an additional optical receiver(RX), when optical signals with a specific wavelength is externally inputted, the system can convert the signal into electric signal, and then convert it back to the optical signal(s) with a(or more than 2) wavelength(s).

Here, the wavelengths of optical signals outputted through an external modulator(EM) can be varied by controlling the currents applied to the Fabry-Perot laser diodes(FPLD1, FPLD2, ..., FPLDn).

As mentioned thereinbefore, a transmission system using a light source in accordance with the present invention reduces the cost per channel. Moreover, it can increase the output power, and thus it makes it easy to constitute a transmission system and expand the network coverage.

In addition, a wavelength-division multiplexed transmission system in accordance with the present invention is constituted for wavelength-division multiplexed optical signals to be inputted and/or outputted through the same optical fiber, and thus it can reduce the number of  
5 fibers required for optical communication to be half of that of the prior art.

Since those having ordinary knowledge and skill in the art of the present invention will recognize additional modifications and applications within the scope thereof, the present invention is not limited to the embodiments  
10 and drawings described above.

## WHAT IS CLAIMED IS:

1. A method of constituting a wavelength-tunable light source, characterized by injecting an external light into a Fabry-Perot laser diode to lock the output wavelength of said Fabry-Perot laser diode to be within the bandwidth of the said injected light, further characterized by tuning the output wavelength of said Fabry-Perot laser diode by tuning the wavelength of said light.
2. A method of constituting a wavelength-tunable light source as claimed in claim 1, characterized in that side mode suppression ratio, noise characteristics and output power are controlled by controlling the temperature of said Fabry-Perot laser diode.
3. A method of constituting a wavelength-tunable light source as claimed in claim 1, characterized in that side mode suppression ratio, noise characteristics and output power are controlled by controlling the current applied to said Fabry-Perot laser diode.
4. An apparatus for constituting a wavelength-tunable light source comprising:
  - a broad-band light source outputting wide-band light;
  - a tunable band-pass filter, whose pass-band can be varied, selectively

passing only the light within said pass-band;

a Fabry-Perot laser diode providing an output whose wavelength is within the pass-band of the said tunable filter when light is being injected thereto from outside; and

5 an optical circulator, connected to said tunable band-pass filter and said Fabry-Perot laser diode, transferring said light inputted through said tunable band-pass filter to said Fabry-Perot laser diode and transferring the output of said Fabry-Perot laser diode to the exterior.

10 5. A wavelength-division multiplexed transmission system comprising:

a broad-band light source outputting wide-band light;

an optical circulator outputting the optical signals inputted through the first port through the second port and outputting the optical signals  
15 inputted through the second port through the third port;

a  $2N \times 1$  (de)multiplexer, having a common port and  $2N$  input/output ports, transferring optical signals having different wavelengths between said common port and said  $2N$  input/output ports respectively;

20 two wavelength interleavers transferring optical signals having specific wavelengths, that are transferred between said common port and odd-numbered input/output ports of said (de)multiplexer, and blocking optical signals having different wavelengths between the first port and the second port; and transferring optical signals having specific  
25 wavelengths, that are transferred between said common port and

even-numbered input/output ports of said (de)multiplexer, and blocking optical signals having different wavelengths between the first port and the third port;

N Fabry-Perot laser diodes; and

5 N optical receivers converting the input optical signals into electrical signals and outputting them,

characterized in that:

said N Fabry-Perot laser diodes are connected to odd-numbered ports of said (de)multiplexer respectively;

10 said N optical receivers are connected to even-numbered ports of said (de)multiplexer respectively;

said common port of said (de)multiplexer is connected to the first port of a first wavelength interleaver;

15 the second port of a first wavelength interleaver is connected to the second port of said optical circulator;

the first port of said optical circulator is connected to said incoherent light source;

the third port of said optical circulator is connected to the second port of a second wavelength interleaver; and

20 the third port of said second wavelength interleaver is connected to the third port of said first wavelength interleaver.

6. A wavelength-division multiplexed transmission system comprising:

25 a broad-band light source outputting wide-band light;



an optical circulator outputting the optical signals inputted through the first port through the second port and outputting the optical signals inputted through the second port through the third port;

5 a  $2N \times 1$  (de)multiplexer, having a common port and  $2N$  input/output ports, transferring optical signals having different wavelengths between said common port and said  $2N$  input/output ports respectively;

two wavelength-division multiplexers transferring optical signals having specific wavelengths, that are transferred between said common port and the (first ~  $N$ -th) input/output ports of said (de)multiplexer, and blocking optical signals having different wavelengths between the first port and the second port; and transferring optical signals having specific wavelengths, that are transferred between said common port and the ( $N+1$ -th ~  $2N$ -th) input/output ports of said (de)multiplexer, and blocking optical signals having different wavelengths between the first port and the third port;

15  $N$  Fabry-Perot laser diodes providing; and

$N$  optical receivers converting the inputted optical signals into electrical signals and outputting them;

20 characterized in that:

said  $N$  Fabry-Perot laser diodes are connected to the (first ~  $N$ -th) ports of said (de)multiplexer respectively;

said  $N$  optical receivers are connected to the ( $N+1$ -th ~  $2N$ -th) ports of said (de)multiplexer respectively;

25 said common port of said (de)multiplexer is connected to the first port of

a first wavelength-division multiplexer;  
the second port of said first wavelength-division multiplexer is  
connected to the second port of said optical circulator;  
the first port of said optical circulator is connected to said incoherent  
5 light source;  
the third port of said optical circulator is connected to the second port of  
a second wavelength-division multiplexer; and  
the third port of said second wavelength-division multiplexer is  
connected to the third port of said first wavelength-division multiplexer.

10

7. A wavelength-division multiplexed transmission system  
comprising:

a broad-band light source outputting wide-band light;  
an optical circulator outputting the optical signals inputted through the  
15 first port through the second port and outputting the optical signals  
inputted through the second port through the third port;

an  $N \times 1$  (de)multiplexer, having a common port and  $N$  input/output ports,  
transferring optical signals having different wavelengths between said  
common port and said  $N$  input/output ports respectively;

20

$N+2$  wavelength-division multiplexers transferring optical signals,  
having specific wavelengths within a specific free spectral range of  
said (de)multiplexer, that are transferred between said common port  
and said  $N$  input/output ports of said (de)multiplexer, and blocking  
optical signals having different wavelengths between the first port and  
25 the second port; and transferring optical signals having the

wavelengths apart from those of said optical signals, that are transferred between said first port and said second port, with an interval of said free spectral range and blocking optical signals having different wavelengths between the first port and the third port;

5 N Fabry-Perot laser diodes; and

N optical receivers converting the inputted optical signals into electrical signals and outputting them,

characterized in that:

10 said N ports of said (de)multiplexer are connected to the first ports of (third ~ N+2-th) wavelength-division multiplexers respectively;

said N Fabry-Perot laser diodes are connected to the second ports of said (third ~ N+2-th) wavelength-division multiplexers respectively;

said N optical receivers are connected to the third ports of said (third ~ N+2-th) wavelength-division multiplexers respectively;

15 said common port of said (de)multiplexer is connected to the first port of a first wavelength-division multiplexer;

the second port of said first wavelength-division multiplexer is connected to the second port of said optical circulator;

20 the first port of said optical circulator is connected to said incoherent light source;

the third port of said optical circulator is connected to the second port of a second wavelength-division multiplexer; and

the third port of said second wavelength-division multiplexer is connected to the third port of said first wavelength-division multiplexer.

25

8. A wavelength-division multiplexed transmission system as claimed in claim 5, 6 or 7,

characterized by further comprising a temperature controller for controlling the temperature of said (de)multiplexer.

9. A wavelength-division multiplexed transmission system as claimed in claim 5, 6 or 7,

characterized by further comprising N laser diode driving circuits for directly modulating said N Fabry-Perot laser diodes.

10. A wavelength-division multiplexed transmission system as claimed in claim 5, 6 or 7,

characterized by further comprising N temperature controllers for controlling the temperatures of said N Fabry-Perot laser diodes.

11. A wavelength-division multiplexed transmission system comprising:

a broad-band light source outputting wide-band light;

an optical circulator outputting the optical signals inputted through the first port through the second port and outputting the optical signals inputted through the second port through the third port;

an N×1 (de)multiplexer, having a common port and N input/output ports, transferring optical signals having different wavelengths between said common port and said N input/output ports respectively;

N Fabry-Perot laser diodes;

an external modulator, having an input port and an output port for optical signals, modulating the optical signals inputted through said input port according to the electrical signals applied thereto and outputting the modulated signals through said output port; and

5 an external modulator driving apparatus providing said electrical signals for operating said external modulator,

characterized in that:

said N Fabry-Perot laser diodes are connected to said N input/output ports of said (de)multiplexer respectively;

10 said common port of said (de)multiplexer is connected to the second port of said optical circulator;

the first port of said optical circulator is connected to said incoherent light source;

15 the third port of said optical circulator is connected to said input port of said external modulator; and

said external modulator driving apparatus is connected to said external modulator.

12. A wavelength-division multiplexed transmission system as claimed  
20 in claim 11,

characterized by further comprising an optical receiver connected to the input port of said external modulator driving apparatus and thereby converting the optical signal inputted into said optical receiver into electrical signal, and then re-converting said electrical signal into  
25 optical signals and outputting said re-converting optical signal.

13. A wavelength-division multiplexed transmission system as claimed  
in claim 11 or 12,

characterized by further comprising a temperature controller for  
controlling the temperature of said (de)multiplexer.

14. A wavelength-division multiplexed transmission system as claimed  
in claim 11 or 12,

characterized by further comprising N polarization controllers connected  
in-between said N Fabry-Perot laser diodes and said N input/output  
ports of said (de)multiplexer.

15. A wavelength-division multiplexed transmission system as claimed  
in claim 11 or 12,

characterized by further comprising a polarization controller connected  
between said third port of said optical circulator and said external  
modulator.

16. A wavelength-division multiplexed transmission system as claimed  
in claim 11 or 12,

characterized by further comprising N temperature controllers for  
controlling the temperatures of said N Fabry-Perot laser diodes.

1/11

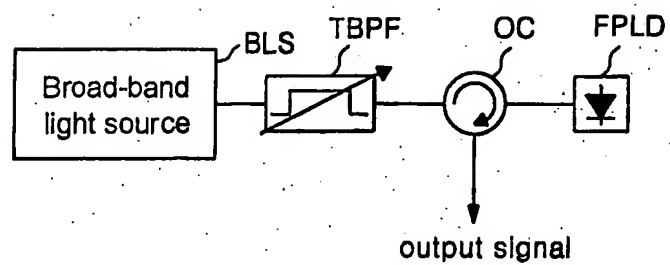


FIG. 1

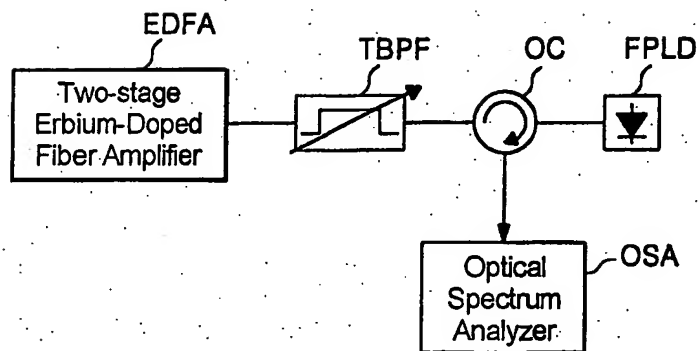


FIG. 2

2/11

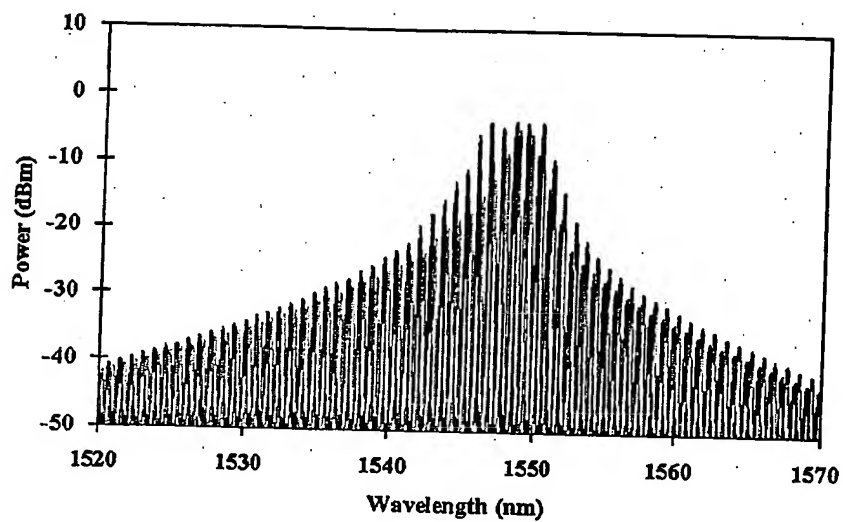


FIG. 3a

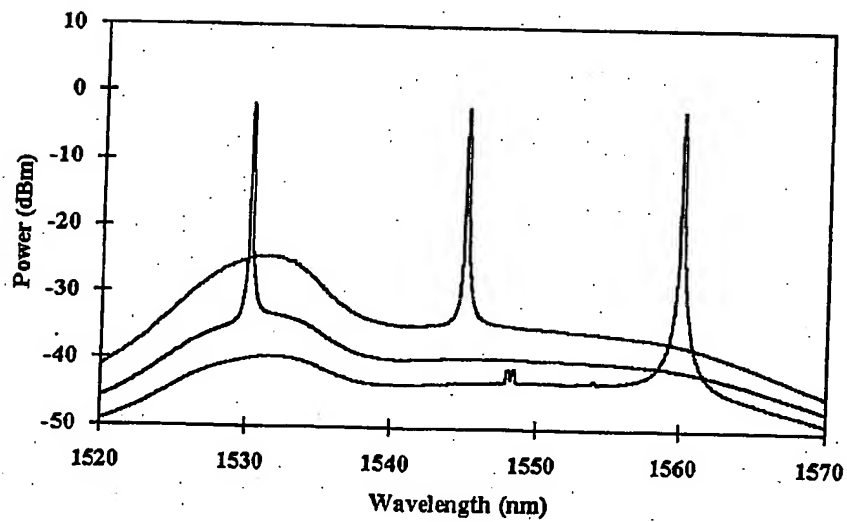


FIG. 3b



3/11

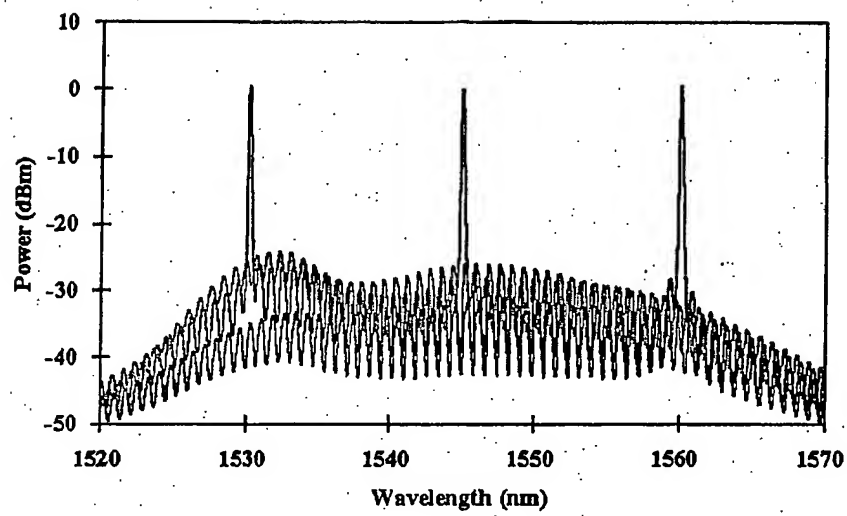


FIG. 3C

4/11

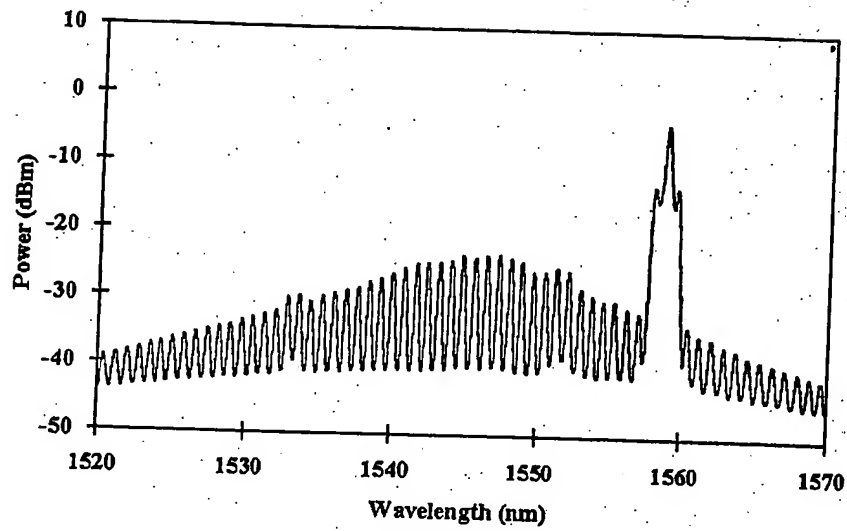


FIG. 4a

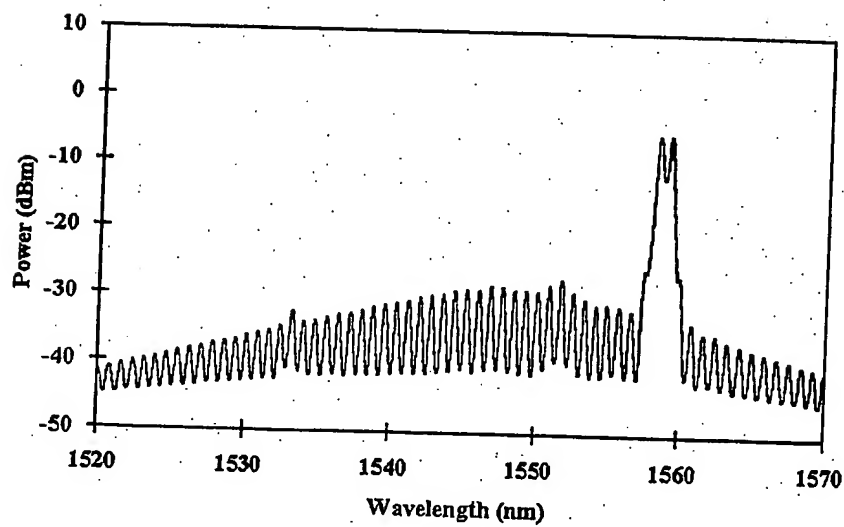


FIG. 4b

5/11

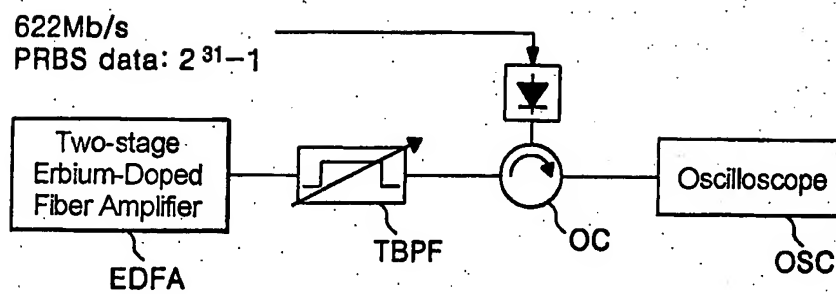


FIG. 5a

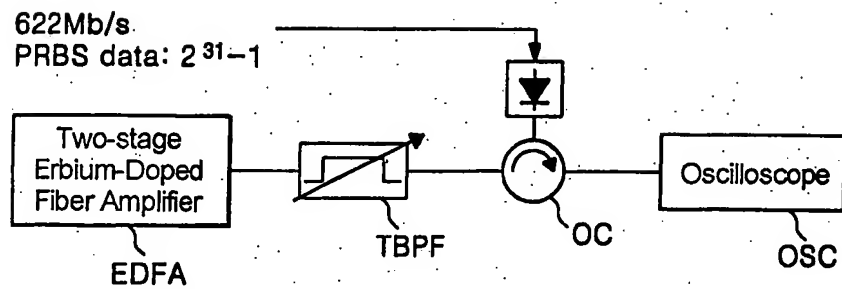


FIG. 5b

6/11

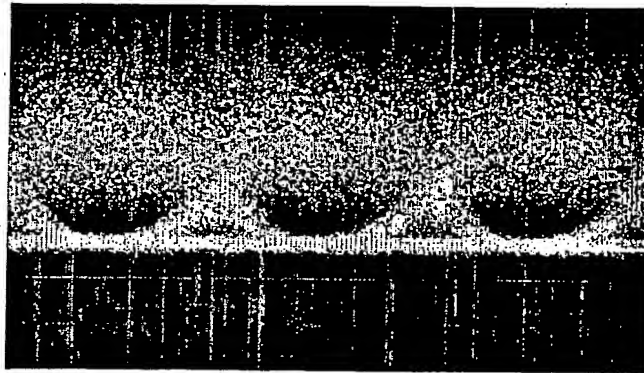


FIG. 6a

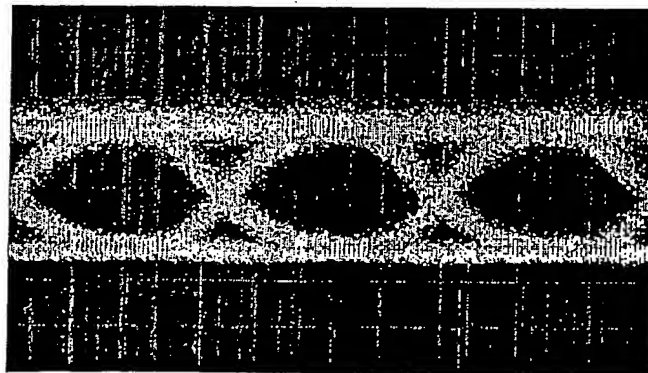


FIG. 6b

7/11

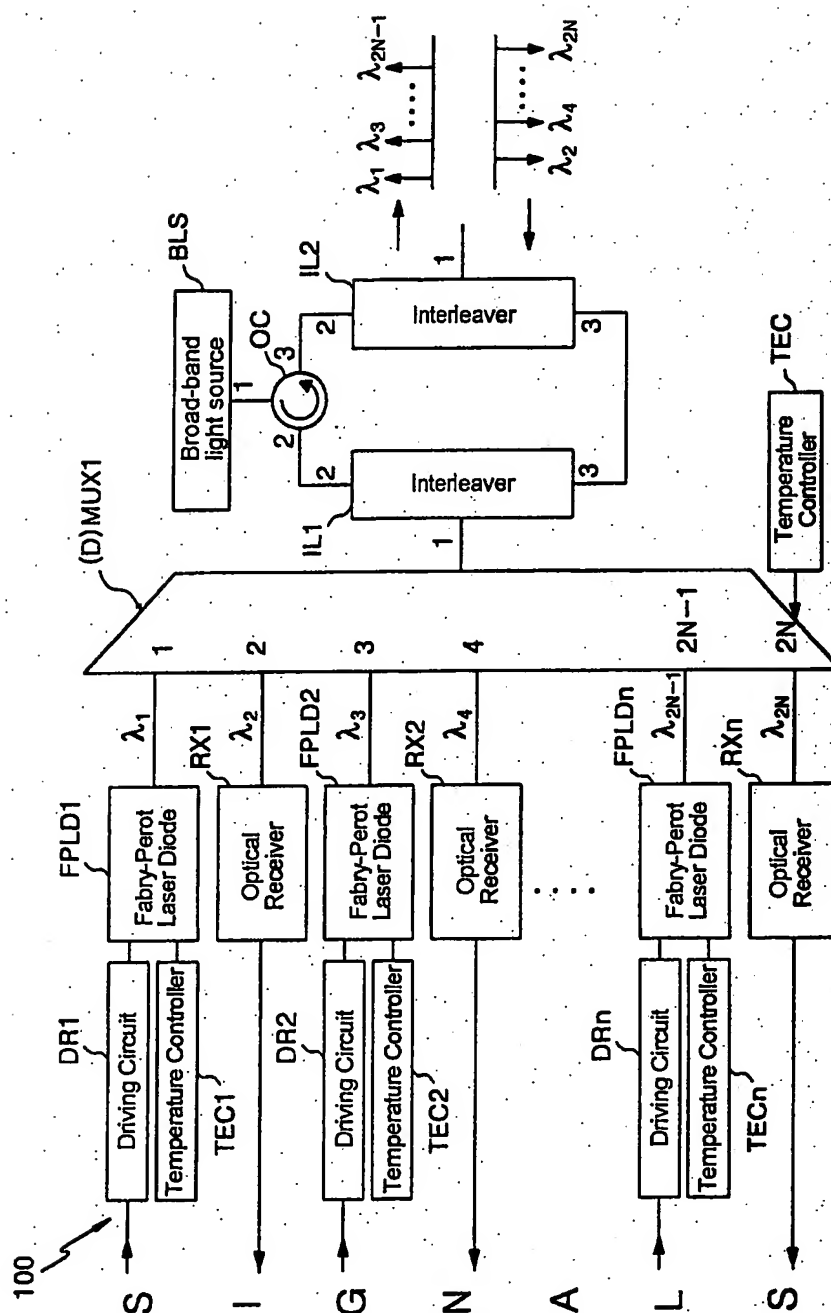


FIG. 7

8/11

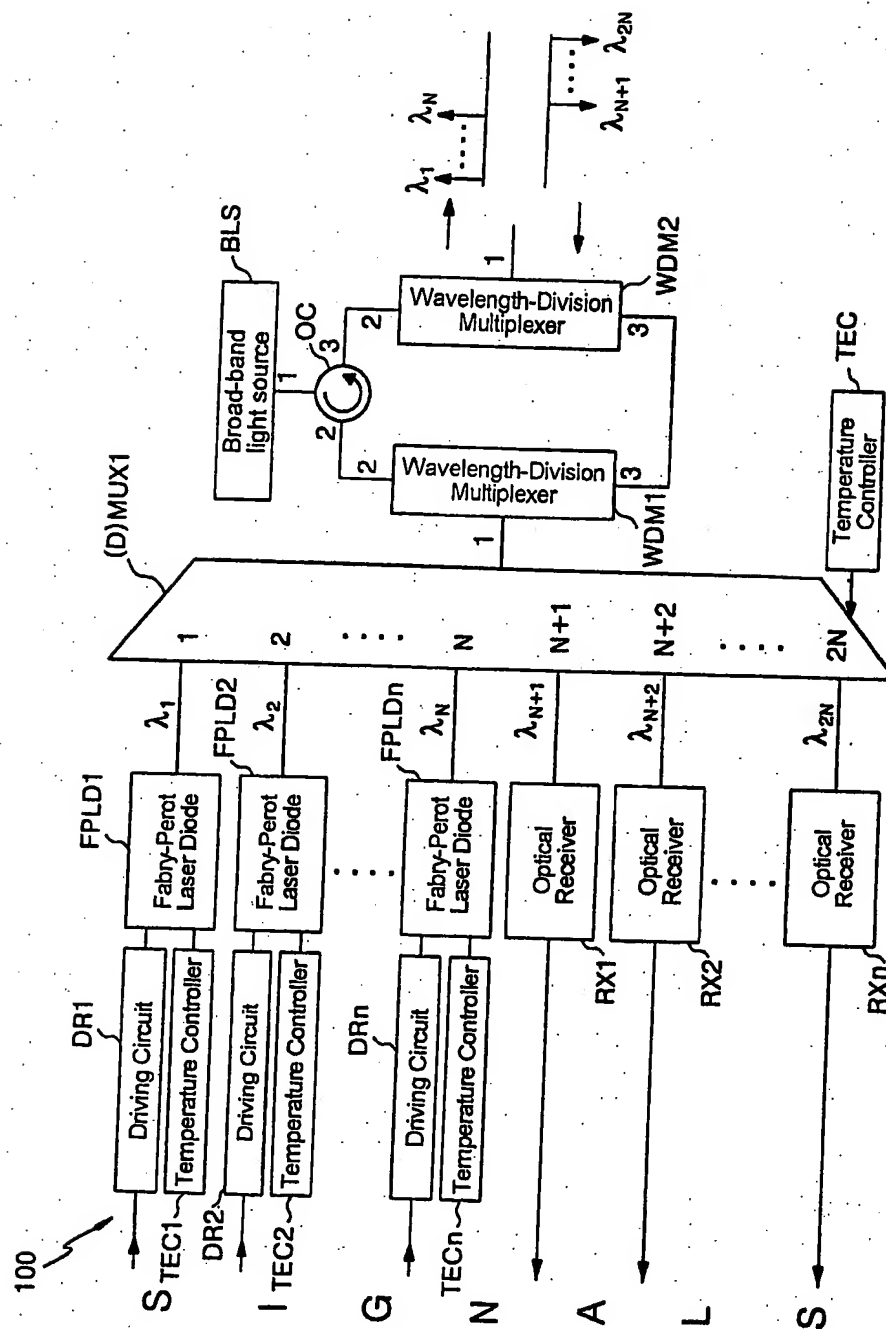


FIG. 8

9/11

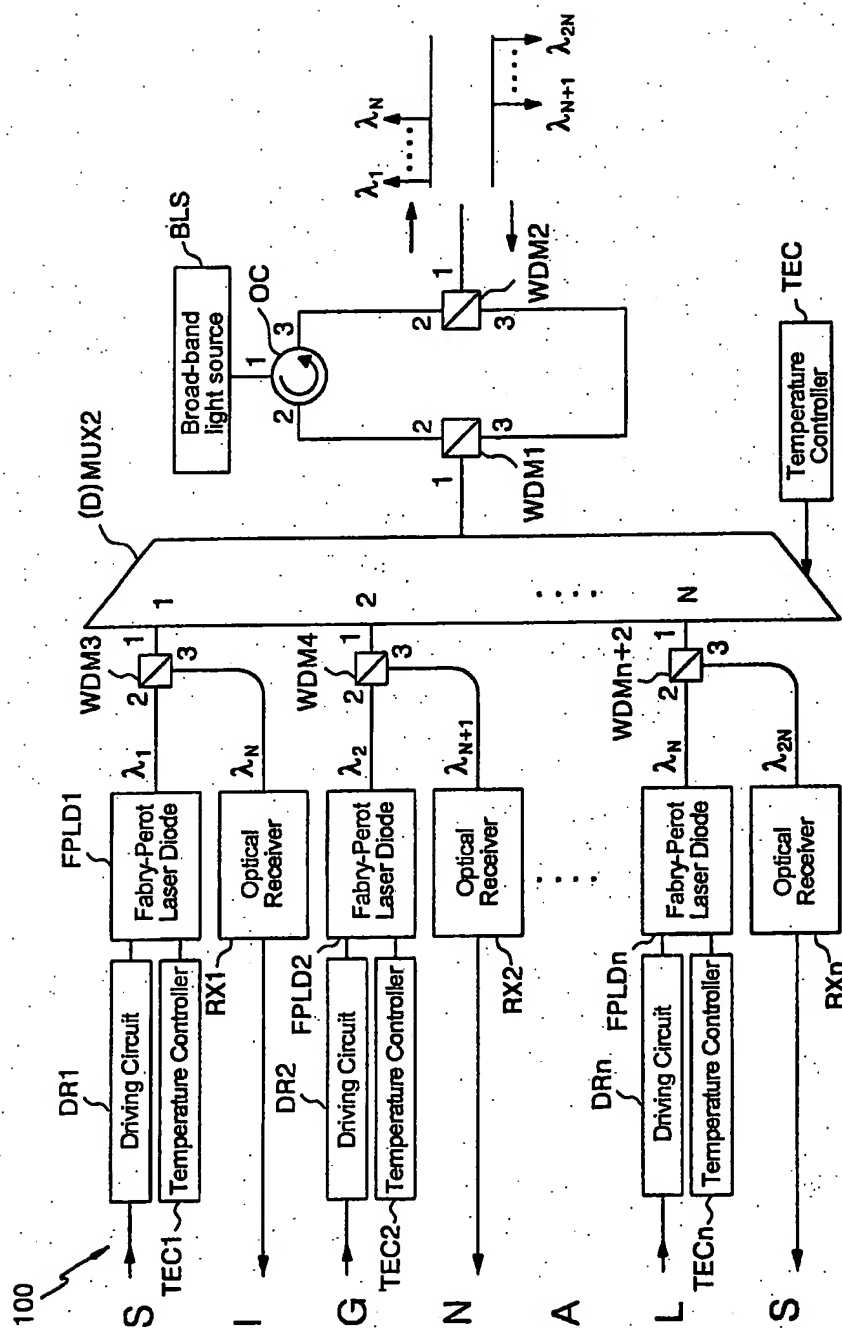


FIG. 9

10/11

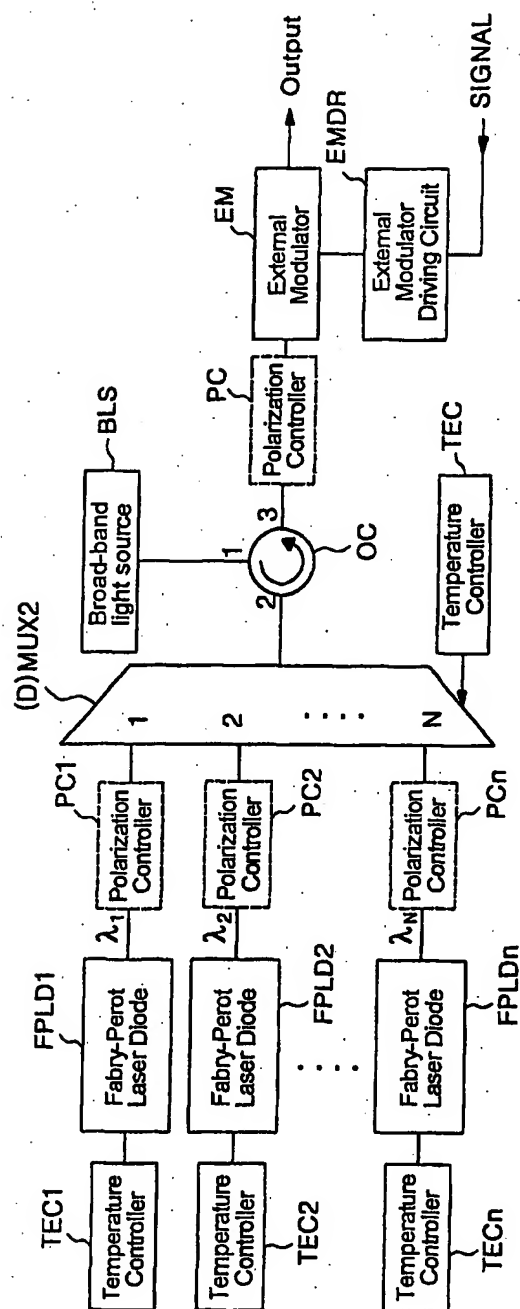


FIG. 10



11/11

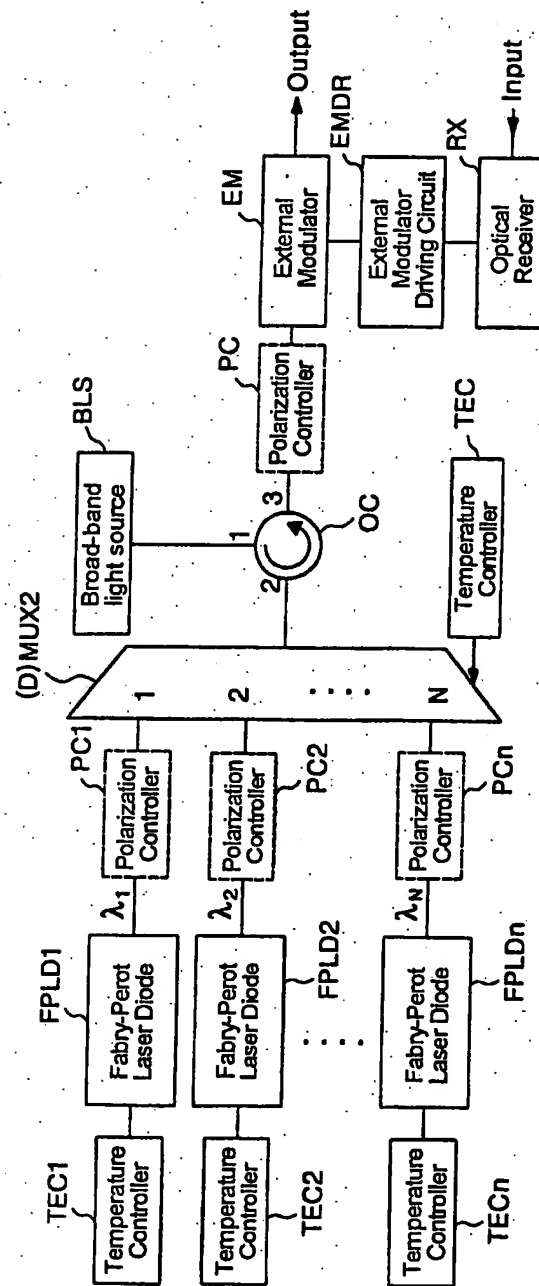


FIG. 11

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/KR03/00462

**A. CLASSIFICATION OF SUBJECT MATTER****IPC7 G02B 6/293**

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

IPC7 G02B 6, H04J 14

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean Patents and applications for inventions since 1975

Korean Utility models and applications for Utility models since 1975

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2001/4290 A1 (Chang Hee Lee, Huyn Deok Kim) 21 JUNE 2001	1 - 4
Y	See the whole document	11 - 16
Y	US 5440417 A (AT&T Corp.) 08 AUGUST 1995 See the whole document	11 - 16
A	US 5835517 A (GORE & ASS) 09 April 1998 See the abstract	5 - 16

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"I" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&amp;" document member of the same patent family

Date of the actual completion of the international search

13 JUNE 2003 (13.06.2003)

Date of mailing of the international search report

17 JUNE 2003 (17.06.2003)

Name and mailing address of the ISA/KR

Korean Intellectual Property Office  
920 Dunsan-dong, Seo-gu, Daejeon 302-701,  
Republic of Korea

Facsimile No. 82-42-472-7140

Authorized officer

YOON, Byoung Soo

Telephone No. 82-42-481-5642



**INTERNATIONAL SEARCH REPORT**  
Information on patent family members

International application No.  
PCT/KR03/00462

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2001/4290 A1	21. 06. 2001	KR 2001-63062 A	09. 07. 2001
US 5440417 A	08. 08. 1995	EP 647994 A1	12. 04. 1995
		JP 7177127 A	14. 07. 1995
US 5835517 A	10. 11. 1998	WO 9814807 A	09. 04. 1998